

Suzuki GSX 1400 fitting instructions

Thank you for purchasing a Hamicad radiator grill we hope you will be pleased with the product
NOTE any twisting of the grills is quite normal and is caused by the manufacturing process and does not affect the performance or is in no way detrimental to the final fitted product.

** Please note that the oil radiator is very delicate and can be easily damaged and a competent person should only undertake fitting. All pictures show the Hamicad radiator grill fitted**

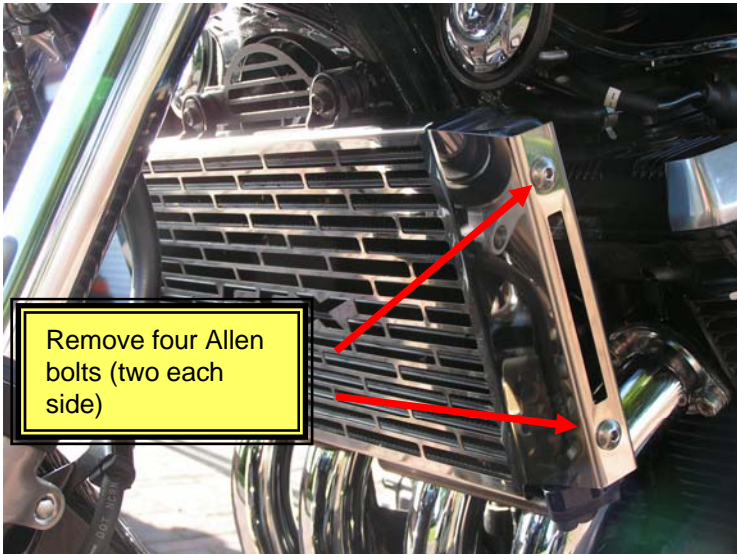


Fig 1

Step1

Remove the existing radiator end caps by removing the four bolts (as marked on fig.1) the caps will not be used when fitting the new grill.

Step2

Fit the new radiator grill by sliding one end onto the oil cooler and then flex the other flange over the oil cooler (there is enough flexibility in the grill to facilitate this which will ensure a good secure fit).

Align the 4 holes and then fit the existing bolts (Figs 1 & 2 already shows the new grill fitted).

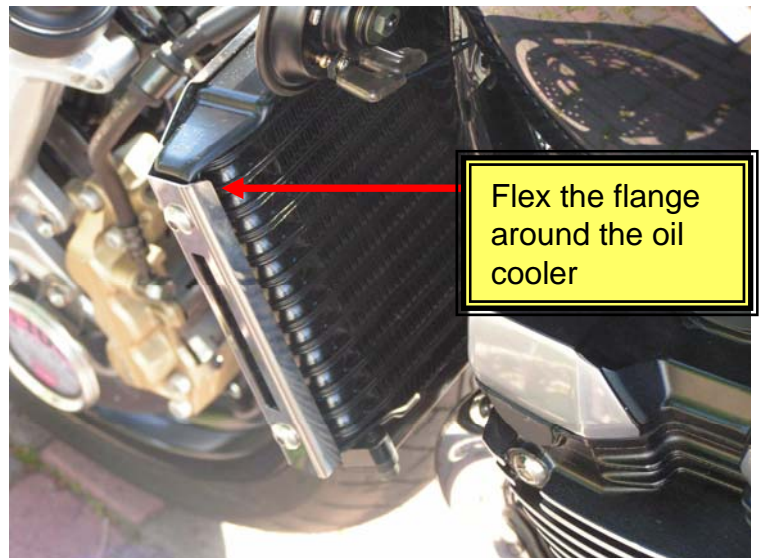


Fig 2