

Suzuki GSX-R1000 K7 Fender Eliminator fitting instructions

Thank you for purchasing the Hamicad GSX-R1000 K7 fender eliminator we hope you will be pleased with the product.

Fitting Procedure:


1 Remove the seat by removing the two allen headed bolts




2 Remove the rear tool cover and remove the toolkit




3 Unplug the electrical connection to the rear number plate light ensuring that you take note of the routing of the cable.

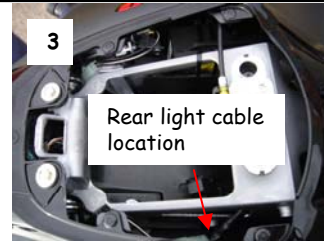

4 The cable route is tight and difficult to remove /refit. To assist in removing/replacing the cable first release the two black clips closest to the cable to do this you just push the centre of the fastener in and it releases allowing the exterior to be removed. This will allow the plastic to flex creating space for the cable to pass through

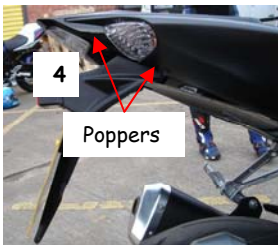

5 Remove the four bolts holding the original mudguard on and take the unit off.

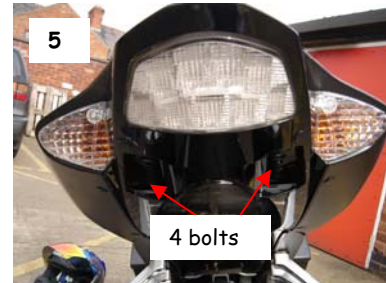

6 Remove the original rear light and fit it to the new fender eliminator using the two replacement spacers provided.

7 **IMPORTANT****** Re-route the rear light electrical cable through the grommet (provided) and back to the tool holder compartment before refitting the fender and tightening the bolts. Failure to do this will make it extremely difficult to refit the electrical cable after tightening the bolts up.

Replace the four mounting bolts and tighten them up.

8 Reconnect the rear light connector and check the rear light functions. Refit the seat using the two allen headed bolts and refit the tool holder cover

9 Picture showing the Hamicad fender eliminator fitted



Please note that although every effort has been made to fit and test the fender eliminator, no liability will be accepted by Hamicad Limited to any damage caused to you or your motorcycle whilst being fitted or when fitted. The fender eliminator is intended for race use only

<http://www.hamicad.co.uk>